


ELEVATION VIEW 'A'

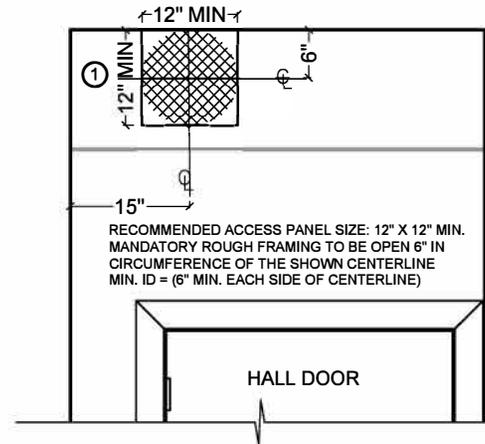

ELEVATION VIEW 'B'

- ① RECOMMENDED CLEARANCE FOR ACCESS TO MOTOR / GEARBOX WITH ACCESS DOOR ABOVE DOOR OF SHAFT.
- ② RECOMMENDED ACCESS PANEL ROUGH FRAMING SIZES ARE 12" X 12" MIN. WIDTH & 24" X 24" MAX WIDTH TO BE OPEN IN CIRCUMFERENCE OF THE SHOWN CENTERLINE

ACCESS DOOR BY GENERAL CONTRACTOR.
 * ANY OTHER CONFIGURATION WILL NEED TO BE CONSULTED WITH PRODUCTION PRIOR TO CONSTRUCTION.
 ALL DIMENSIONS ARE BASED ON INFRA-DRIVE SPECS
RECOMMENDED OVERHEAD

REQUIREMENTS:
 102" MINIMUM FOR 6'8" CAB
 108" MINIMUM FOR 7'4" CAB
 114" MINIMUM FOR 8'0" CAB

PLEASE CONSULT YOUR TSM TO REVIEW ALTERNATIVE OVERHEAD OPTIONS.